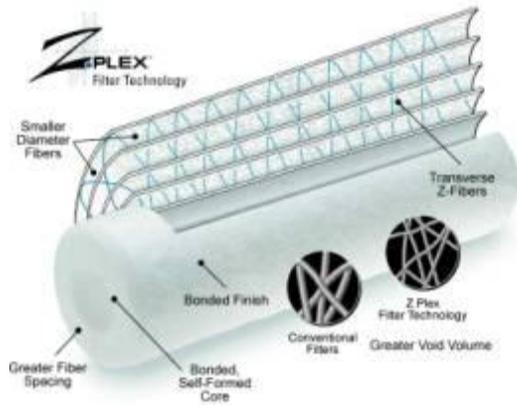


# Purtrex\* Plus Depth Cartridge Filters



**Figure 1 : Purtrex Plus Depth Cartridge Filters Use Z.Plex\* Filter Technology**

## Description and Use

The Purtrex Plus depth filter is an exceptional value for general applications where long life, high purity and low change-out frequency are required. Produced through GE Water & Process Technologies' patented Z.Plex\* filter manufacturing technology (Figure 1), Purtrex Plus is a 100% pure polypropylene depth filter with excellent performance.

Purtrex Plus' 3-dimensional filter matrix provides lower pressure drop and high dirt holding capacity. This translates to longer life and fewer change-outs than existing string-wound or resin-bonded filters. Purtrex Plus' melt-bonded exterior and core ensures no media migration.

Purtrex Plus contains no wetting agents, solvents, antistatic agents or binders, and meets the requirements of the FDA for food and beverage contact. The filter incinerates to trace ash for easy disposal.

## Typical Applications

- Potable water filtration
- Chemical filtration - wide chemical compatibility
- Beverage
- Electronics
- Meets FDA compliance for food and beverage contact

## General Properties

Purtrex Plus filters are available in the following nominal pore size micron ratings: 1, 3, 5 and 10 microns. Tables 1, 2, 3 and 4 further details on materials of construction, dimensions, flow performance and ordering information.


**Table 1: Materials of Construction**

Filtration Media	Polypropylene
Endcaps and Adapters	Polypropylene

**Table 2 : Dimensions**

Nominal Outside Diameter	2.5" (6,4 cm)
Nominal Inside Diameter	1" (2,5 cm)

**Table 3: Flow Performance in Clean Water<sup>1</sup>**

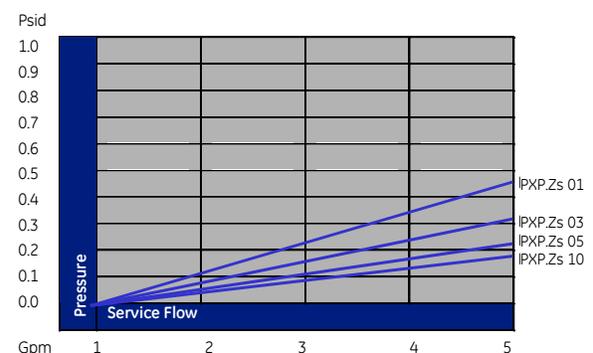

<sup>1</sup>Data based on 10" length filter



Find a contact near you by visiting [www.gewater.com](http://www.gewater.com) and clicking on "Contact Us".

\* Trademark of General Electric Company; may be registered in one or more countries.

©2013, General Electric Company. All rights reserved.

## Additional Information

Purtrex Plus depth cartridge filters are made from thermally bonded fibers of polypropylene. GE certifies that it uses no resin binders, lubricants, antistatic or release agents, in the manufacture of these filter cartridges. The resin used for manufacturing the filter media meet the food contact requirements of the U.S. FDA 21CFR 177.1520. Purtrex Plus depth cartridge filters meet the safety requirements of Article 3 of the EU Framework Regulation No. 1935/2004/EC and may be used as intended in all of the EU Member states in full compliance with the EU Plastics Regulation No. 10/2011. Purtrex Plus depth cartridge filters meet the criteria for USP class VI-121°C Plastics.

GE filter cartridges are designed and manufactured for resistance to a wide range of chemical solutions. Conditions will vary with each application and users should carefully verify chemical compatibility. Please contact your GE distributor for more information.

## Ordering Information

To configure a standard Purtrex Plus filter with no adapters on either end, select one item from each of the first three columns. Your model number may look like this: PXP.Zs 05-20

To order Purtrex Plus filters with end adapters, add one item from the last 2 columns to your filter selections (use all 6 columns). Your model number may look like this: PXP.Zs 05-20XK

**Table 4: Ordering Information**

Type	Micron Rating	Nominal Cartridge Length	End #1 Adapter	End #2 Adapter
PXP.Zs	01 = 1 µm 03 = 3 µm 05 = 5 µm 10 = 10 µm	10 in. (25.4 cm) 20 in. (50.8 cm) 30 in. (76 cm) 40 in. (102 cm)	X = Standard Plain End	K = Self Seal Spring

